

# DIGITAL CALIPERS WITH INTERCHANGEABLE POINTS

DATA  
OUTPUT



1124-300A


**short spherical/flat points (included)** Unit: mm





**long spherical/flat points (included)** Unit: mm




**short spherical blade points (included)** Unit: mm



**long spherical blade points (included)** Unit: mm

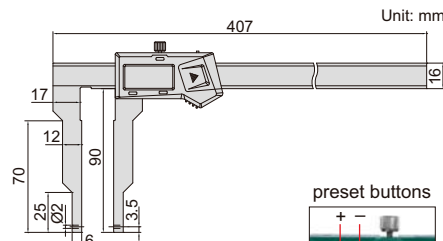


preset buttons



zero setting block for external measurement (included)




- Supplied with 4 pairs of points and zero setting block for external measurement
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel
- Optional accessory: points (code 1526-T101, 7392, 7391, 7381, 7321), depth stop (code 6143)



depth stop 6143 (optional)



measure internal and external grooves

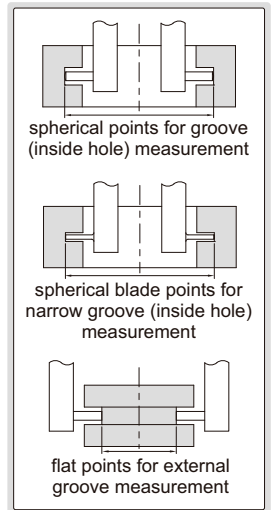

**With data interface**

Code	Data output cable (optional)
1124-300A	code 7315-21, 7302-21

**Built-in wireless**

Code	Receiver (optional)
1124-300AWL	code 7315-2/3/6/7/8

Point	Range	Accuracy	Application
short spherical/flat points	24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external)	±0.04mm	spherical points for grooves inside hole (small hole) flat points for external grooves
long spherical/flat points	40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external)	±0.04mm	spherical points for grooves inside hole (large hole) flat points for external grooves
short spherical blade points	24-324mm/1-12.7" (internal) 0-288mm/0-11.3" (external)	±0.04mm	for narrow grooves inside hole (small hole)
long spherical blade points	40-340mm/1.5-13.3" (internal) 0-272mm/0-10.7" (external)	±0.04mm	for narrow grooves inside hole (large hole)

**Multifunctional points 7392\* (optional, page 30)**



**Ball points 7391\* (optional, page 30)**



**Screw thread points 7381\*, 7321\* (optional, page 30)**



\* It is necessary to use point sleeve (code 1526-T101) for these points